






Easy-to-car handle

The Highest Energy Saving Option to Variable Speed

- Compatible with All Heat Pumps and Automated Systems
 - 115-208-230V Multi Voltage
 - Highest Hydraulic Flow of Any
 1.5 3 HP Pump @1725 RPM's
 - Maximizes Energy Efficiency
- Hydraulic Range from 28 46 Feet of Total Dynamic Head

CONSOLIDATED MANUFACTURING INTERNATIONAL



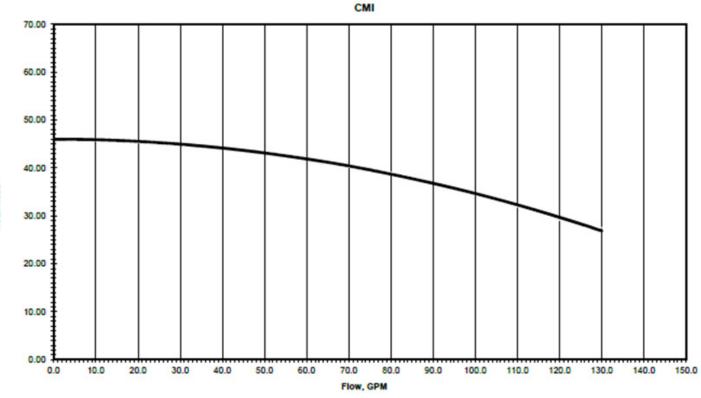

Additional Features


- Single Speed DOE Certified
- Uprated 2HP Equivalent Medium Head Pump
- Super Quiet Operation at Full Flow
- 1 ¹/₂" 2 ¹/₂" Plumbing Interface
- Use for Primary, Booster, or Waterfall Application
- "Never Run Dry Weir"
- Self-Priming with as Little as 20 GPM Flow Rate
- Patented & Hydraulically Redesigned Pump & Motor

Trademarks & Certifications

Patent #11415137
 DOE/CEC Certified
 CSA C22 2 NO 108 01



CSA C22.2 NO. 108.01
 Compliant

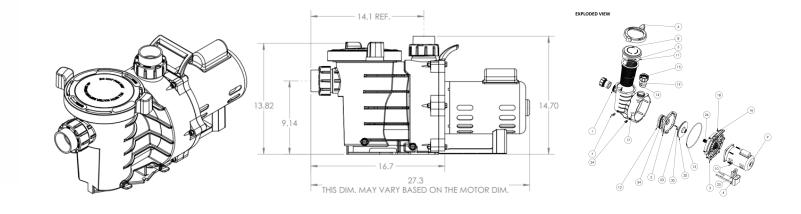

fotal Head