


# **REV-LED**

## **Owners Manual**



**SYNC LIGHTS & MUSIC! COMPATIBLE WITH:**



 **Bluetooth™**  **WiFi™**  **Google Assistant**

 **amazon alexa**  **SmartThings**

# Installation Instructions

## Step 1:

Run ½" or larger conduit from each pool light.

## Step 2:

Install weather proof box on conduit at equipment pad.

## Step 3:

Run REV-LED50C, 100C, or 150C cord light to weather proof box. (50C comes with coupling to connect 2 together for lights 50+ feet from equipment pad. This will replace 100C and 150C.)

## Step 4:

Connect ETL Listed IP68 connectors at each light and screw light into 1/2 fitting on pool wall.

## Step 5:


Connect REV-LED50C cord for each light to the UL Listed smart transformer (REV-LEDP1 or REV-LEDP2) in the weather proof box.

## Step 6:

Run the 120V supply cable from the weather proof box with ½" liquid tight conduit to power supply.


## Step 7:

Scan the QR code or download the Smart Life app from the App store/GooglePlay store and register with your phone number, email, or social media account.



## Step 8:

Connect the light with your smartphone. Open the “SmartLife” App, press the “Add Device” icon in the upper right corner. Select “Lighting Device” then go to the “Add Device” page. Select REV-LED to begin pairing.

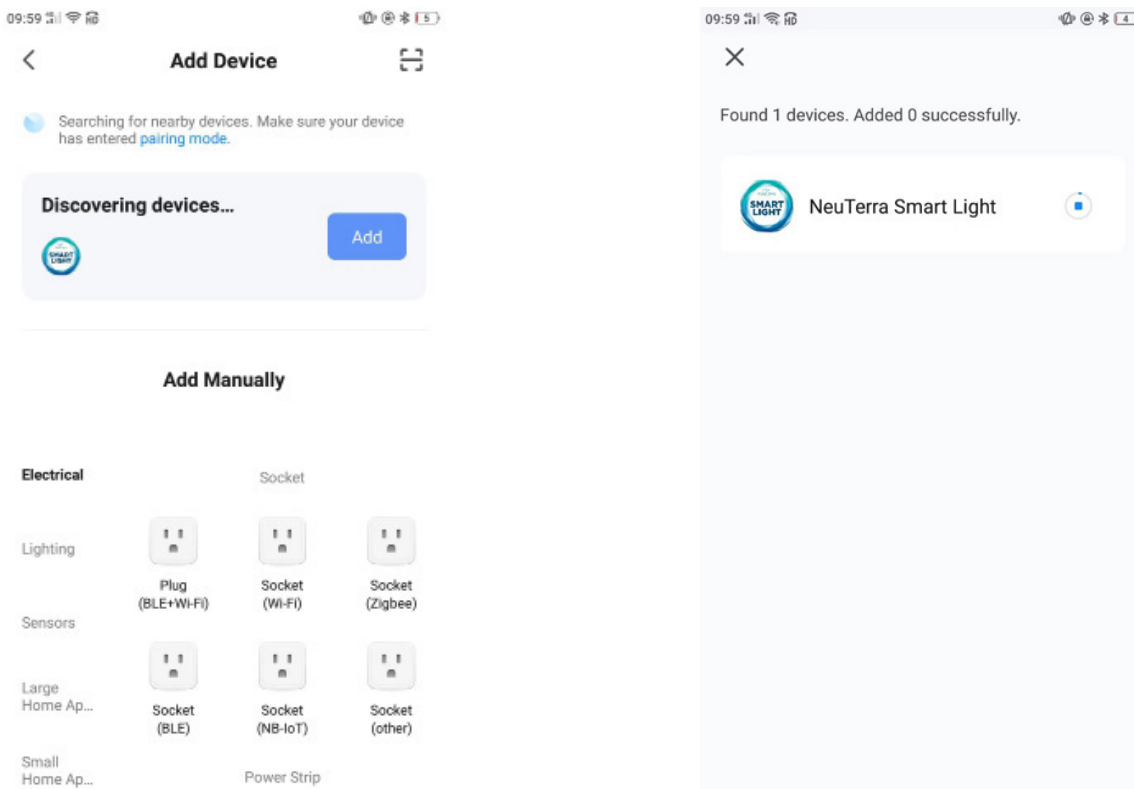

## Step 9:

Follow the instructions on the App and let your device enter setup mode. If the light is blinking fast, skip the reset step. If not:

- Make sure power is on
- Make sure your Bluetooth setting is enabled on your phone.
- Make sure WiFi is 2.4 GHz
- To reset the light, cut power off and on 5 times for 5 seconds.

## **Step 10: (optional)**

TO SHARE APP ON ADDITIONAL DEVICES:

Use QR code or google play or apple stores to download the SmartLife app on as many additional devices as desired.

## **Step 11:**

On any additional device, after app is installed, simply LOG IN using same username and password used for setup.

App can be open on multiple devices at the same time with the same username and password!

## **Programming the light(s)**

NOTE: you can rename each Light on the app to correspond to its location/function. If you have two or more smart transformers, you can group

them together to all display the same color or theme. However, scheduling

on/off has to be done on each individual transformer/light.

To schedule when lights turn on and turn off:

Click the desired light on the home screen-This brings up the control screen for that light.

Click window in bottom right of screen

Click Schedule

Click Add

Set the desired time for the lights to turn on

Select the switch “Turn on” to turn on lights at that desired time.

Click Save

Click Add (for a second schedule)

Set the desired time for the lights to turn off

select “Turn off” to turn off lights at that desired time.

Click Save

Each “schedule” performs one function, either turn off or tun on.

To set the color of the light when turned on:  
From home screen, click on the desired light.  
Click the desired light on the home screen-This brings up the control screen for that light.  
Click window in bottom right of screen  
Click Power-on behavior  
Select the desired option for the color when lights are scheduled to turn on.  
Exit out of the screen with the option selected.

# Warranty

Your new REV-LED Light and power adapter is warranted for a period of 12 months, Lights for a period of 36 months.

This warranty is nontransferable and extends only to the original retail buyer and only during the time in which the original retail buyer occupies the site where the product was originally installed.

This warranty applies to products used in swimming pools, spas, & aquaculture applications only and does not apply to any product which has been subjected to negligence, alteration, accident, abuse, misuse, improper installation, abrasives, corrosion, improper voltage supply, vandalism, civil disturbances, or acts of God (including but not limited to damage caused by freezing, lightning strikes, and other damage caused by catastrophic events). The only warranties authorized by CMI are those set forth herein. CMI does not authorize other persons to extend any warranties with respect to its products, nor will CMI assume liability for any unauthorized warranties made in connection with the sale of its products. CMI will not be responsible for any statements that are made or published, written or oral, which are misleading or inconsistent with the facts as published in the literature or specifications furnished by CMI.

## Warranty Claim Procedure

To be eligible of the benefits of this warranty, the consumer must contact the installer/seller, builder, dealer, or retailer (point of purchase) or the CMI pool products distributor in your area as soon as the defect occurs and make sure that the product does not deteriorate further. The consumer must have proof of purchase. Any product returned or repaired without prior authorization of CMI will be refused. All equipment must be inspected by a local CMI authorized representative or at the factory before warranty is authorized. All charges or expenses for freight to and from the factory, removal and reinstallation of the products, or installation of a replacement product are the responsibility of the purchaser unless otherwise expressly authorized in writing by CMI. CMI, at its discretion, may repair or replace free of charge any product that proves defective within the warranty period, or it may issue credit in the amount of the invoice of the defective product in lieu of its repair or replacement. CMI reserves its right to substitute new or improved product on any replacements.

# **Thank you for your purchase and enjoy safe, infinite color lights in your pool & spa.**

We hope you enjoy and tell your friends! For questions or additional product information, please visit our website at [ww.CMIWebsite.com](http://www.CMIWebsite.com) or contact our Smart Lighting Team via [info@cmiwebsite.com](mailto:info@cmiwebsite.com).

